

66/ET/OT



OLD U.S. PAT

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 520.37728X00

First Inventor or Application Identifier Shigekazu INOHARA

Title See 1 in Addendum

Express Mail Label No

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 67] 1  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 12] 1
4. Oath or Declaration [Total Pages 5] 1  
a. ☒ Newly executed (original or copy)  
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)  
i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) ☐ Statement filed in prior application  
(PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: .....

\* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ / \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_

Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label:

020457

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name					
Address					
City	State	Zip Code			
Country	Telephone	Fax			

Name (Print/Type)	Carl I. Brundidge	Registration No. (Attorney/Agent)	29,621
Signature		Date	10/13/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

## Addendum

1. METHOD AND APPARATUS FOR IMPLEMENTING EXTENSIBLE NETWORK-ATTACHED SECONDARY STORAGE

METHOD AND APPARATUS FOR IMPLEMENTING  
EXTENSIBLE NETWORK-ATTACHED SECONDARY STORAGE

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to a computer system, more specifically to a method and an apparatus for implementing extensible secondary storage, suitable for application programs.

10 Description of the Related Art

Primary components in a modern computer system include computers (one computer comprises a processor, memory, and peripheral devices), a network, and a secondary storage. The storage heretofore was considered as a device attached to a computer, however the situation has been changed recently.

15 At first, there become common in recent years that a plurality of computers shares a single storage, because of the widespread usage of network. The processing power of the computer attaching the storage may become a bottleneck to cause storage input/output (I/O) from another computer through a network to be slowed down.

20 Secondly, The storage capacity and the throughput required for a storage increase from year to year. "Greg's law" anticipates that "the demand of the storage capacity for a data warehouse becomes double in nine months". As a result, the

25

number of storages attached to a single computer may grow up so that the computer may become the bottleneck of the storage I/O.

Thirdly, since the number of transistors integrated in a hard disk controller LSI has been increased rapidly, the opportunity to realize a high-function storage has been increased.

By keeping in mind such situation as mentioned above, there has been proposed the addition of some new features to the storage controller LSI. Some candidates of these new features comprise a network interface and advanced function for the application programs.

By providing the storage with a network interface, the storage may be directly connected to the network. The storage thereby will be able to receive and process I/O requests from a plurality of computers without any hosting computer.

At present, the most popular interface between the storage and the computer is block I/O. By providing the storage with advanced features for every application such as sorting, image processing, and basic operations in a database system (such as selection processing, projection processing, concatenation, aggregation processing, and so on) instead of conventional block I/O, the storage will be able to cover part of processes performed by the processor in a computer.

Some exemplary storage proposed to feature a network

interface and some part of a filesystem includes the system described in the paper by Garth A. Gibson et al., "A Cost-Effective, High-Bandwidth Storage Architecture" (Proceedings of the 8th Conference on Architectural Support for Programming Languages and Operating Systems, 1998, published by ACM; hereinafter reference #1), and the system described in the paper by Steven R. Soltis et al., "The Global Filesystem" (Proceedings of the Fifth NASA Goddard Space Flight Center Conference on Mass Storage Systems and Technologies, 1996, published by NASA; hereinafter reference #2).

Some exemplary high-function storage proposed in the assumption of plural applications includes the system described in the paper by Erik Riedel et al., "Active Disks: Remote Execution for Network-Attached Storage" (Technical Report CMU-CS-97-198, 1997, published by Carnegie Mellon University; hereinafter reference #3), the one described in the paper by Anurag Acharya, "Active Disks: Programming Model, Algorithms and Evaluation" (Proceedings of the 8th Conference on Architectural Support for Programming Languages and Operating Systems, 1998, published by ACM; hereinafter reference #4), and the one described in the paper by Kimberly Keeton et al., "A Case for Intelligent Disks (IDISks)" (SIGMOD Record, Volume 27, Number 3, 1998, published by ACM; hereinafter reference #5).

The references #3 to #5 described the downloading from a computer to a storage of program modules that may achieve high

function through the network. The languages proposed appropriate for writing such modules includes the language described in the paper by J. Gosling et al., "The Java Language Specification" (1996, Addison-Wesley; hereinafter reference #6).

Now, there will be described a server-attached disk (SAD), the conventionally exemplary storage, with reference to the accompanying Fig. 2.

A SAD 203 is usually connected to one computer 201 through an I/O cable 202. The storage may occasionally be connected to a plurality of computers. SAD 203 is comprised of a storage controller 204 and a disk 209, and the storage controller 204 constitutes of an interface control part 205, a buffer management part 206, buffer memory 207, and a disk controller 208.

The disk 209 is a storage medium (secondary storage) that can save data even after the shutdown of power. The control interface part 205 receives I/O requests and other transmissions sent from external devices through the I/O cable 202 and transmits the response to the requests, and other transmissions to the I/O cable 202. Buffer management part 206 controls the buffer memory 207. The buffer memory 207 temporarily saves data obtained from the disk 209. The disk controller 208 controls the disk to block read from and block write to the disk 209.

Interface 210 between the SAD 203 and the computer 201

provides input/output of block basis.

Reference is made to Fig. 3, the arrangement of a recently emerged storage, network-attached storage (NAS) will be described.

5 One or more of NAS 303 may be connected through a network 302 to one or more of computers 301, 301', etc. NAS 303 is comprised of a storage controller 304 and disk 309, and the storage controller 304 is comprised of a network controller 305, a buffer management part 306, buffer memory 307, and a disk controller 308.

10 The network controller 305 receives I/O requests and other transmissions sent from external devices through the network 302 and transmits the response to the requests, and other transmissions to the network 302. The disk 309, the buffer management part 306, the buffer memory 307, the disk controller 308 have their functions similar to the disk 209, the buffer management part 206, the buffer memory 207, and the disk controller 208, respectively.

20 NAS interface 310, the interface between NAS 303 and computers 301, 301', ..., provides input/output of block basis.

Reference is now made to Fig. 4, the arrangement of Advanced SAD storage, which is the extended version of conventional SAD storage, will be described.

25 One or more of Advanced SAD storages 403 may usually be connected to one computer 401 through an I/O cable 402. In some

cases it may be connected to a plurality of computers. The Advanced SAD storage 403 is comprised of a storage controller 404 and a disk 409, and the storage controller 404 is comprised of an interface control part 405, a buffer management part 406, 5 buffer memory 407, a disk controller 408, and application-oriented function part 411.

The I/O cable 402, the interface control part 405, the buffer management part 406, the buffer memory 407, the disk controller 408, and the disk 409 provide the same functionality as the I/O cable 202, the interface control part 205, the buffer management part 206, the buffer memory 207, the disk controller 208, and the disk 209, respectively. The application-oriented function part 411 provides some advanced functions for specific applications, such as sorting, image processing, basic 10 operations of a database system such as selection processing, projection processing, concatenation, and aggregation 15 processing, and so on. High-function SAD interface 410 may have, in addition to block I/O, interface for making use of advanced processing provided by the application-oriented function part 20 411.

Reference is now made to Fig. 5 to describe the arrangement of a high-function NAS storage, which has been recently proposed.

One or more of high-function NAS storages 503 may usually 25 be connected to one or more of computers 501, 501', etc. through



a network 502. The high-function NAS storage 503 is comprised of a storage controller 504 and a disk 509, the storage controller 504 is comprised of a network controller 505, a buffer management part 506, buffer memory 507, a disk controller 508, and an application-oriented function part 411.

The network controller 505, the disk 509, the buffer management part 506, the buffer memory 507, and the disk controller 508 may have the same functionality as the network controller 305, the disk 309, the buffer management part 306, the buffer memory 307 and the disk controller 308, respectively.

The application-oriented function part 411 provides some advanced functions for specific applications, such as sorting, image processing, basic operations of a database system (such as selection processing, projection processing, concatenation, and aggregation processing, and so on). The high-function NAS interface 510 may have, in addition to block I/O, interface for making use of advanced processing provided by the application-oriented function part 411. The system described in reference #4 and the one described in reference #5 may download functions of the application-oriented function part 411 from external devices.

In order to achieve a storage which may directly connect to a network and provide high function, the most fundamental problem to be solved is that the storage is to contiguously provide functions effective to a vast range of application. If

the range of application is sufficiently vast, that may lead to larger market, and then larger market may lead to some decrease of development cost and to some increase of development speed. Although there have been proposed a number of machines proprietary for database usage, these machines was difficult to have sufficient competitive power to survive among other multi-purpose machines using versatile devices, because these database-specific machines lacked sufficient range of versatility so that enough development cost was not invested.

In order to achieve storage contiguously providing functionality effective to a vast range of applications, there are three keys: higher extensibility of functionality, lower development cost of functionality, and higher cost performance ratio in the light of Total Cost of Ownership (TCO). More specifically these are the objects to be solved by the present invention.

In the Prior Art the extensibility has been considered as to downloading of advanced functions for every applications to the storage as needed, however, the development cost and TCO have not been sufficiently considered.

In the systems described in the references #1 and #2, the filesystem is created on the block access so that the application range will be limited. Although the system described in the reference #3 is considered as to provide a plurality of advanced functions, the way to provide these functions is unknown. The

reference #4 proposes a plurality of advanced functions achieved on the software layer in the proximity of conventional operating system (OS). However the structure of the software corresponding to the conventional OS is different in every application. For example, a relational database management system (RDBMS) do not use filesystem provided by OS. Thus RDBMS do not require a filesystem. This means that even if a conventional software layer was directly applied to a storage, it might be difficult to address such vast range of application to be covered by the storage. The system described in the reference #5 is still in its designing step, however intends to use with RDBMS with its limited range of application.

The requirements of development cost and of TCO will be further considered hereinbelow, which have not been sufficiently taken into account in the Prior Art.

Concerning the development cost, if each of advanced functions for every application is developed separately, the development cost thereof will be increased, resulting in the weakened competitiveness. Thus program modules (referred to as "module" hereinafter) should be developed with lower development cost and should achieve advanced functions designated for each of applications. Also the modules for achieving advanced functions are different in every application. If the common part of the advanced functions are extracted and shared, overlapped development of the common part of modules

will not be required as well as the debugging of the common part of module will be eliminated, so that lower development cost will be realized. In addition, it is anticipated that the development cost will be further reduced in case where some mechanism, which may run a developed module in high speed, is provided, since the development time required for tuning of the module may be shortened.

With respect to the requirement of development cost, as can be seen, there are problems needed to be solved, as follows:

- Providing storage with common part of sophisticated functions for a plurality of applications;
- Achieving said common part with lower development cost;
- Using said common part for achieving advanced functions for a plurality of applications;
- Implementing protection when a common part is called by the advanced functions for a plurality of applications;
- Implementing mutual exclusion when said common part is called by the advanced functions for a plurality of applications; and

- Providing a mechanism for faster execution of modules.

With respect to the requirement of the total cost of ownership, in order to take into account the fact that a plurality of storages may coexist on a network, there is problem to be solved as follows:

- Distributing modules to plural storages if they exist.

## SUMMARY OF THE INVENTION

Accordingly, the object of the present invention is to provide a method and apparatus for implementing extensible network-attached secondary storage by solving problems cited  
5 above to contiguously provide functions effective for a vast range of applications so as to enable the storage of next generation to be achieved.

Means for solving problems cited above will be now  
10 described hereinbelow.

In accordance with the present invention, a piece of data used by an application (i.e., object) is taken into consideration for the common part of advanced functions for a plurality of applications. Some examples of object include,  
15 for example, such data as a table, a record, and a column in a database system, a file in a filesystem, as well as a file in a specific file format for an application dealing with the specific file format on a filesystem. Method for placing an object data into a secondary storage is usually set for an  
20 application or a range of application, the number of which method is less than the number of advanced functions for every application. Accordingly, a module accessing to an object stored on the secondary storage (referred to as "object access module" hereinbelow) should be separated from a module  
25 implementing advanced functions (referred to as "function

module" hereinbelow), and the interface therebetween should be explicitly defined.

In order to address to a vast range of applications, the extensibility of storage may be provided by enabling object access modules to be downloadable from a computer to storage. The object access modules may determine how to be stored in the secondary storage. Objects for an application may be retrieved from one or more of blocks in a secondary storage by using these modules. In such a way, the development cost of function modules for a vast range of applications may be reduced.

It should be understood that the objects referred in accordance with the present invention is not limited to such objects having simple structure, such as variable-length data present in a contiguous blocks. It should also be understood that objects in general exists in a plurality of non-contiguous blocks, and that references between blocks are also present. For example, in the filesystem described in the paper by Uresh Vahalia, "UNIX Internals: The New Frontiers", pp.262-266, 1996, Prentice-Hall; hereinafter reference #7), one file may be linked by using inter-block reference of one, two or three levels. B-trees and hash tables, which are used by preference in the index of database, are also complex objects including multilevel inter-block reference.

The development cost may be reduced by writing in the declaration the declarative part of the way to store objects

in a secondary storage (in which part of which block and in which order the object is stored). Thus in accordance with the present invention, object description data is introduced, which describes declaratively the way to store objects in secondary storages.

By enabling the object description data to be downloadable from a computer to storage, the extensibility of storage may be provided while object-basis accesses may be achieved with lower development cost.

In accordance with the present invention, the reduction of development cost may be possible with function modules achieved by using the functions of object access modules. By enabling the function modules to be downloadable from a computer to storage, the extensibility of storage may be provided while sophisticated functions for each application may be achievable.

Since the object access module is shared, it is likely to be stable. On the other hand, since a function module is specific for each application or for each advanced function, it is likely to be time-consuming until debugged to be stable. By taking this fact into consideration, in accordance with the present invention, a module, which protects the use of object, access modules from a function module (protection module) will be introduced.

By enabling the protection module to be downloadable from a computer to storage, protection may be provided while the

extension for each of objects and for each of application programs may be achievable.

Mutual exclusion will be provided since it is likely to occur the case where function modules use a single object at the same time. Since there are inclusive relationships between objects (for example, a table, a record, and a column in a relational database are related in the way of inclusion in this order), the storage should provide a module implementing mutual exclusion (locking module), by taking into account the inclusive relation between objects in order to implement mutual exclusion of such a plurality of objects as cited above in a way preferable.

By enabling the locking module to be downloadable from a computer to storage, mutual exclusion will be provided while the extension for each object or for each application program may be achievable.

In order to run modules in higher speed, a compiler should be provided in the storage or in a management computer.

In accordance with the present invention, a management computer, which manages the downloading of modules into a plurality of storages, will be provided so as to download modules into the storages after the processing of modules (typically a compilation) if required.

The foregoing and other objects, advantages, manner of operation and novel features of the present invention will be understood from the following detailed description when read



in connection with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic block diagram illustrating the  
5 overview of an embodiment in accordance with the present  
invention;

Fig. 2 is a schematic diagram illustrating the structure  
of a server-attached storage;

Fig. 3 is a schematic diagram illustrating the structure  
10 of a network-attached storage;

Fig. 4 is a schematic diagram illustrating the structure  
of a high-function server-attached storage;

Fig. 5 is a schematic diagram illustrating the structure  
of a high-performance network-attached storage;

15 Fig. 6 is a schematic diagram illustrating the structure  
of active network storage;

Fig. 7 is a schematic diagram illustrating the structure  
of a module;

20 Fig. 8 is a schematic diagram illustrating the structure  
of an object access module using object description data;

Fig. 9 is a schematic diagram illustrating the structure  
of a protection module;

Fig. 10 is a schematic diagram illustrating the structure  
of an object description data (table form);

25 Fig. 11 is a schematic diagram illustrating an embodiment

of the object description data (table form);

Fig. 12 is a schematic diagram illustrating the structure of an object description data (parser form);

Fig. 13 is a schematic diagram illustrating an embodiment  
5 of the object description data (parser form);

Fig. 14 is a schematic diagram illustrating the structure of object description data (pattern-matching type);

Fig. 15 is a schematic diagram illustrating the structure of protection policy;

10 Fig. 16 is a schematic flowchart illustrating the sequence of the object-based I/O using the object description data in table form;

Fig. 17 is a schematic flowchart illustrating the sequence of the object-based I/O using the object description data in  
15 parser form (1);

Fig. 18 is a flowchart illustrating the sequence of the object-based I/O using the object description data in parser form (2);

20 Fig. 19 is a schematic flowchart illustrating the process flow of foundObject used in the parser;

Fig. 20 is a schematic diagram illustrating the registration of a module from an ANS client computer into ANS;

Fig. 21 is a schematic diagram illustrating the registration of a module from an ANS client computer into ANS,  
25 through an ANS management computer;

Fig. 22 is a schematic diagram illustrating an ANS management table; and

Fig. 23 is a schematic diagram illustrating the structure of striping I/O by ANS.

5

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment carrying out the present invention will be described in greater detail with reference to the accompanying drawings. For the sake of simplicity, the embodiment carrying out the present invention will be simply referred to as the "embodiment." Referring to Fig. 1 at first, the overview of the present embodiment will be described.

Referring to Fig. 1, the reference number 101 designates to a computer system preferable to the present embodiment. The system 101 comprises a network 103, one or more of computers 102, 102', ... interconnected by the network 103, and one or more of active network storage (ANS) 104.

The network 103 may be a LAN (local area network) used in an organization or in one working group thereof (here an organization may be an enterprise, a school, or a similar corporation). Also, the network 103 may be part of WAN (wide area network) or WAN itself, which may interconnects a plurality of geologically dispersed points. In addition, the network 103 may be an interconnection network between computers, or a network interconnecting processors within parallel computers.

The network 103 may be an I/O cable (such as SCSI cable) connecting a computer and an ANS 104.

Computers 102, 102', ... may be comprised of arbitrary computers, such as personal computers, workstations, parallel computers, mainframes, or portable computers.

The number and the arrangement of computers 102, 102', ..., network 103, and ANS 104 as shown in Fig. 1 are for the purpose of illustration and should not be considered to limit the scope of the present invention.

The ANS 104 is an extensible secondary storage. The ANS 104 is comprised of one or more of disks 111 and an active network storage controller (ANSC) 105.

The disk 111 is a storage medium (secondary storage), which may retain data after shutdown of power. Although there are many designations such as sector, or track, for the unit of data storage in the disk 111, the data storage unit in this specification will be referred to as "block." The disk 111 is comprised of a plurality of blocks, and may perform input/output in block-basis. If the secondary storage is a hard disk, size of a block is 512 bytes or 4K bytes of fixed length in many cases. If the disk 111 is a hard disk for a mainframe, block size may be either fixed length or variable length. If the disk 111 is another type of secondary storage such as a tape drive, the block size of that secondary storage is specified by the device. It should be noted that in case of a certain secondary storage that

may provide I/O interface in byte-basis, instead of block-basis, the present invention might be applied by considering one byte as one block.

The ANSC 105 controls the ANS 104. The ANSC 105 is  
 5 comprised of a network controller part 106, a module execution part 107, a buffer management part 108, buffer memory 109, and a disk controller 110.

The network controller part 106 receives I/O requests and other transmissions sent from external devices such as computers  
 10 102, 102', ... through the network 103 and transmits the response to the requests, and other transmissions to the network 103. The module execution part 107 achieves many functions provided by the ANS 104. The details of functions will be described later. The buffer management part 108 controls the buffer memory 109.  
 15 The buffer memory 109 temporarily stores data obtained from the disk 111. The disk controller 110 controls the disk 111 to block read from and block write to the disk. The network controller part 106, the buffer management part 108, the buffer memory 109, the disk controller 110 are well known in the Prior Art therefore  
 20 will not be described further in greater details.

The functions provided by the module execution part 107 may be classified into four types as block-basis I/O, object-basis I/O, advanced function for each application, and other functions.

25 The storage has been provided the object-basis I/O to

computers. The main function of the object-basis I/O are to read data from a block (to read data from a block corresponding to the specified at least one block number so as to answer the computer), and to write data to the block (to write data to a block corresponding to the specified at least one block number to be written).

Object-basis I/O is to read/write a whole "object" as described later or part thereof. An object is a piece of semantic data to be stored to storage by an application program run on the computers 102, 102'. The definition of object may differ from one application to another, or from one field of application to another. Some examples of object includes, such data as a table, a record, and a column in a database system, a file in a filesystem, as well as a file in a specific file format for an application dealing with the specific file format on a filesystem.

The advanced function for each application is I/O process defined by an application program when needed. Some examples of the advanced function include, for example, sorting, image processing, and basic operations in a database system (such as selection processing, projection processing, concatenation, aggregation processing, and so on).

Other functions include, for example, initialization, backup, and copy of the disk 111.

The module execution part 107 implements the functions as

above cited by combining one or more program modules 112, 112', 112"... The modules 112, 112', 112", ... may be classified into function module 113, object access module 114, block access module 115, protection module 116, and locking module 117, according to the function provided. A new type of module may additionally be defined.

The function module 113 implements the advanced function for each application as cited above. There may be single or plural modules according to the type of advanced function. The object access module 114 implements object-basis I/O as cited above. There may be single or plural modules according to the type of object. The block access module 115 implements block-basis I/O as cited above. There may be single or plural modules according to the type of block. The protection module 116 implements protection by selectively allowing or denying calls between modules. There may be single or plural modules according to the type of protection. The locking module 117 implements mutual exclusion of object-basis. There may be single or plural modules according to the type of mutual exclusion.

The ANS interface 118 interfaces between ANS 104 and external devices such as computers 102, 102'... In order to perform advanced function for each application, object-basis I/O, block-basis I/O, and protection, the interface includes registration/deletion of modules 119, method invocation 120,

registration/deletion of object description data 121,  
 registration/deletion of protection policy 122.

The registration/deletion of modules 119 is an interface  
 for registering the modules 112, 112', and 112", ... to the ANS  
 104 from external devices and for deleting modules from the ANS  
 104. The method invocation 120 is an interface for invoking  
 a specific function of the module registered to the ANS 104 to  
 receive the response. A "method" is a process flow provided  
 by a module, as described later. The registration/deletion of  
 object description data 121 is an interface for registering to  
 and for deleting from the ANS 104 an object description data,  
 which is data describing how an object is stored in the secondary  
 storage. The object description data will be described in  
 greater details below. The registration/deletion of  
 protection policy 122 is an interface for registering to and  
 for deleting from the ANS 104 the protection policy, which policy  
 is data describing the way of protection between modules  
 implemented by the protection module 116. The protection  
 policy will be described in greater details below.

The structure of the present embodiment has been described  
 as above. Referring now to Fig. 6, the structure of ANS 104  
 and its typical operation will be described.

When an request of either registration/deletion of modules  
 119, method invocation 120, registration/deletion of object  
 description data 121, or registration/deletion of protection



policy 122 is transmitted from the network or I/O cable to the  
ANS 104, said request will be received by the network controller  
part 106 (601).

5 The network controller 106 will send the request to either  
the module execution part 107 or the buffer management part 108  
according to the type of request (602, 615). The requests sent  
to the buffer management part 108 will be functions provided  
by the conventional SAD type storage, such as block-basis I/O  
of the method invocation 120. The requests sent to the module  
10 execution part 107 will be any other type of requests. In other  
words, the registration/deletion of modules 119,  
registration/deletion of object description data 121,  
registration/deletion of protection policy 122, and method  
invocation 120 except block-basis I/O will be sent to the module  
15 execution part 107.

In the module execution part 107, module management part  
650 manages and executes a variety of modules. The  
registration/deletion of modules 119 will be dispatched by the  
module management part 650 to an appropriate module.

20 A method invocation request with respect to the advanced  
function for each application will be sent to a function module  
651 to be processed (603). A method invocation request with  
respect to the object-basis I/O and the registration/deletion  
of object description data 121 will be sent to an object access  
25 module 652 to be processed (609). Among method invocation

request with respect to the block-basis I/O, the requests that the buffer management part cannot directly deal with will be sent to a block access module 653 (611). The registration/deletion of protection policy 122 will be sent to the protection module 654 for processing (659). The module registration/deletion 119 will be processed directly by the module management part 650. In other words, in case of module registration, the module sent thereto will be saved in the module execution part 107 as a new module. In case of module deletion, the module specified will be deleted from within the module execution part 107.

The function module 651 uses the object-basis I/O function provided by the object access module 652 and the mutual exclusion function provided by the locking module 655 to implement advanced functions (605). The locking module 655 further uses function of the object access module 652 (608) to implement the mutual exclusion.

When the function module 651 uses the function of the object access module 652, the function module 651 invokes a method in the object access module 652. This method invocation will be at first sent by the module management part 650 to the protection module 654 to determine whether the invocation will be allowed or denied (604), if invocation allowed, the method invocation request will be sent to the object access module 652 (607).

The object access module 652 implements object-basis I/O by using block-basis I/O function of the block access module 653 (610).

The block access module 653 implements block-basis I/O by either transmitting a block retrieval request to the buffer management part 108 (613) or directly making reference and changes to the buffer memory 109 (614). The buffer management part 108 may be directly invoked, for example when the module management part 650 saves a modules (612).

The buffer management part 108 manages the contents of the buffer memory 109 (616). For example, it performs a block replacement of the buffer memory 109, invokes write-back processing of dirty blocks to the disk 111, transfers a block reference request with respect to the block absent in the buffer memory 109 to the disk controller 110 (617), and invokes a process for transferring a block from the disk controller 110 to the buffer memory 109 (618).

The disk controller 110 receives the block-basis I/O request to the disk 111 to actually drive the disk 111 to perform I/O (619).

The internal structure and typical operation of the ANS 104 have been described as above. The internal structure and operation of each type of respective modules, object description data, and protection policy will be now described in greater details below.

Referring now to Fig. 7, the internal structure and typical operation common to each module will be described.

The object access module 114, block access module 115, protection module 116, locking module 117 have a common structure as shown in Fig. 7.

The module 701 contains one or more of methods 702, more than zero variable (attribute, 703). When receiving a method invocation 704 from another module in the module 701 or from outside, a corresponding method will be run. Method 702 refers and changes its attribute 703, or invoke a method 705 of another module to proceed the process.

In case of a function module, the advanced function for each application will be provided as methods to outside and other modules. Method used by the function module includes methods in the object access module and in the locking module.

In case of object access module, object (and its some part) will be specified as a method to provide to outside and other modules the method of referring to and changing its contents.

More specifically, getObject(Object) {specifying an object to refer to the whole contents of that object}, getObject(Object, offset, size) {specifying an object, the number of bytes from the top of the object, and the number of bytes of the target to refer to the specified data}, getObject(Object, tag1, tag2...) {specifying an object, and tag(s) pointing to the portion to be retrieved to refer to the

specified data}, getObject(Object, i, j, k...) {specifying an object and index pointing to the portion to be retrieved to refer to the specified data}, and getNextObject(Object) {referring the next part of the specified object} will be provided as method referring to part of an object. Tags will be described later with reference to Fig. 10, 12, and 14.

Also, setObject(Object, data) {specifying an object to change the whole contents of that object}, setObject(Object, data, offset, size) {specifying an object, the number of bytes from the top of the object, the number of bytes of the target to change the specified data}, setObject(Object, data, tag1, tag2...) {specifying an object, tag(s) pointing to the portion to be changed to change the specified data}, setObject(Object, data, i, j, k...) {specifying an object and index pointing to the portion to be changed to change the specified data}, and setNextObject(Object, data) {changing the next part of the specified object} will be provided as methods for changing objects. These methods will be implemented by using methods in the block access module.

In addition to the above mentioned methods, in case where said object access module uses the object description data, addObjectDescription(desc) and deleteObjectdescription(desc) will be provided, for registering and deleting an object description data, as will be described later.

In case of the block access module, block referring method

and block changing method will be provided to outside and other modules as methods. More specifically, `getBlock(blockID)` {specifying a block number to refer to that block}, and `setBlock(blockID, data)` {specifying a block number to change that block} will be provided.

In case of the protection module, `getProtection(source, dest, method)` will be provided for the module management part, which method determines whether or not a method invocation is allowed or denied according to the given specification (source, destination, method) of said method invocation. In addition, in case in which said protection module can register or delete a protection policy, a method `addProtectionPolicy(policy)` and `deleteProtectionPolicy(policy)` for registering and deleting respectively a protection policy description data will be provided, as will be described later.

In case of the locking module, `lockObject(Object, lock_mode)` for locking an object, `unlockObject(Object, lock_mode)` for unlocking an object, `addObjectRelationship(Object, Object)` and `deleteObjectRelationship(Object, Object)` for registering and deleting respectively the containment relationship between objects will be provided for external and other modules.

Referring now to Fig. 8, the internal structure and typical operation of a module using object description data, among object access modules, will be described.

The object access module using object description data also contains one or more of methods 802 and more than zero attribute 803 in the module 801. The method 802 will be invoked by the method invocation 804 to refer to and change an attribute 803, or to proceed a process by a method invocation 805 of another module. The object access module using object description data retains the object description data 806 in the method 802, registers or deletes the object description data 806 in response to object description data registration/deletion 807. The structure and usage of object description data 806 will be described later by referring to Fig. 10, 12 and 14.

Referring now to Fig. 9, the internal structure and typical operation of a protection module will be described.

The protection module contains in the module 901 a protection check part 902 and a protection policy 903. The protection check method 904 invokes protection check module 902, and method invocation will be allowed or denied with reference to the protection policy 903. The protection module responds to the registration and deletion of protection policies 905 to register or delete a protection policy 903.

Now the object description data will be described. There are three different types of object description data in the present embodiment. The first type is table form, which is preferred if the data string sequence within a block or between blocks is fixed (or such object portion). For example, this

form may be advantageous for a file in a filesystem, and an index of a database system.

The second type of the object description data of the present invention is parser form, which describes the data sequence within a block or between blocks by using context free grammar. This type of object is preferred if the data string sequence within a block or between blocks has relatively large degree of freedom (or such object portion). This form may be advantageous for example, for a table in a database system, or a directory in a filesystem.

The third type of the object description data is pattern matching. The pattern-matching type determines a file format based on whether data in a specified part of a block or an object has some specific value or pattern. This type is preferred if some objects of the same structure may contain data of different format. For example, this form may be preferred when image files in a plurality of file formats are stored in a file in a filesystem and it is desirable to switch advanced functions according to the file format.

Referring now to Fig. 10, the structure of object description data in the table form will be described.

The object description data (table form) 1001 is a table containing six elements, i.e., a tag 1002, type 1003, offset 1004, size 1005, count 1006, and block type 1007. From this table the sequence of data within a block and between blocks



can be obtained. A single row indicates a piece of semantic data in a block.

The tag 1002 is the name given to a piece of semantic data. This name is used for accessing to this data. The type 1003 indicates the type of said data. The offset 1004 indicates from which byte from the top of the object the data is stored. The size 1005 indicates the number of bytes of the data. The count 1006 indicates the total number of the data when the data is successive. The block type 1007 indicates the type of block number pointed to by the data when the data is block number pointing to another block.

Referring now to Fig. 11, the usage of the object description data in table form will be described.

In this example, a file in a filesystem described in the reference #6 will be described as a series of objects. The file in said filesystem is comprised of five different types of blocks. First, UFS\_inode object 1101 is an object storing meta data of said file. It is shown comprised of di\_mode, di\_nlink, di\_uid, di\_gid, di\_size, di\_addr1, di\_addr2, di\_addr3, di\_addr4, di\_gen, di\_atime, di\_mtime, and di\_ctime. For example, when considering di\_mode, it is short type, occupies 2 bytes from the top 0th bytes of the object, and repeats for once. As another example, when considering di\_addr1, it is BLOCK type (i.e., block number pointing to another block), occupies three bytes from the 12th bytes of the top of the object, and repeated for

10 times, and the block referenced to by this element is UFS\_data object 1102.

UFS\_data object 1102, UFS\_indirect1 object 1103, UFS\_indirect2 object 1104, UFS\_indirect3 object 1105 are  
 5 described in the figure in a similar manner. These objects define a structure of a file containing zero to three steps of indirect reference.

Referring now to Fig. 12, the structure of the object description data in parser form will be described.

10 The object description data (parser form) 1201 is a table containing four items, i.e., tag 1202, initialization code 1203, context 1204, and code 1205. From this table, a parser for parsing blocks will be constructed to parse blocks to obtain data sequence within a block and between blocks.

15 The tag 1202 is the name given to a piece of data. The initialization code 1203 is an instruction string to be executed before parsing of the data. The context 1204 specifies the context to be parsed. In accordance with the method of specification of the present embodiment, context free grammar  
 20 and somewhat extended description will be allowed. The code 1205 is an instruction string to be executed after parsing of the context.

Referring now to Fig. 13, the usage of the object description data in parser form will be described.

25 Table definition 1301 indicates an example of table

definition in a database system. This defines a customer table of three columns, `c_id`, `c_name`, and `c_address`.

Grammar 1302 is an object description data of the customer table corresponding to the table definition 1301. The table in this example is in five rows, defining in each row `customer()` for parsing the entire table, `record()` for parsing a row, `c_id()` for parsing `c_ids`, `c_name()` for parsing `c_names`, `c_address()` for parsing `c_addresses`. For example when considering `record()`, it is indicated in the context section that "one row contains at the beginning data of long type indicating the size of record, then following `c_id`, `c_name`, and `c_address`." In the code section is shown a process for declaring the detection of a row by calling `foundObject` method when finishing the parsing of record. By using this table definition 1301 each row/column in the customer table may be detected. It should be noted that although not used in this example, the target block to be processed might be switched by using `switchBlock(blockID)` method in the code 1205.

Referring now to Fig. 14, the structure of object description data in pattern-matching type will be described.

The object description data (pattern-matching type) 1401 is a table containing three items, i.e., file format 1402, tag 1403, and pattern 1404. More than one set of tag 1403 and pattern 1404 correspond to one file format 1402. The file format 1402 is the name given for a file format. The tag 1403 is the name

of a piece of data of part of an object, said name given by another object description data. The pattern 1404 is the pattern for performing the pattern matching with the data indicated by the tag 1403.

5           In case where all the pairs of the tag 1403 and pattern 1404 corresponding to the file format 1402 are matched, an object is determined to be in the file format given in the file format 1402.

10           For example, in the first and second line of Fig. 14, if the data tagged as "header1" in an object is "#!" AND the data tagged as "header2" is "/bin/sh" then this object will be determined to be a shell\_script.

Referring now to Fig. 15, the structure of protection policy will be described.

15           The protection policy is data that the protection module retains for selectively allowing or denying calls between modules. The protection policy description data 1501 is comprised of sender 1502, receiver 1503, method 1504, and allow/deny 1505.

20           The sender 1502 is the sender of method invocation, the receiver 1503 is the receiver of method invocation, the method 1504 is the name of method to be invoked, and the allow/deny 1505 is either "allow" or "deny". The protection module verifies the sender, receiver, and method against the sender  
25           1502, receiver 1503, method 1504 of the protection policy

description data 1501 when invoking a method to determine to allow or deny said method invocation in accordance with the value in "allow/deny" 1505.

Referring now to Fig. 16, the sequence of the object-based I/O using the object description data in table form will be described.

As described above, there are some types of object-based I/O process. Now the sequence for implementing the operation of getObject(Object, "tag1", "tag2"... ) by using the object description data in table form will be described as a typical example. Other variants of the getObject implemented by using the object description data in table form may be implemented in a similar manner. getObject(Object, "tag1", "tag2", ... "tagN") is a method, which refers the block pointed to by the tag1 at the top of the block in the object, then refers the block pointed to by the tag2 pointed to by the tag1, and finally refers to the data met to the tagN.

A loop is formed from step 1601 to 1607. In step 1601, a line of the object description data the tag of which matches with the first tag will be searched. In step 1602, if second tag exists (Y), then control will be passed to step 1603, otherwise, if not then the process proceeds to step 1608. In step 1603, type 1003 of the search result line will be checked to see whether to be block type. If true (Y), then the control passes to step 1604, otherwise, if not (N) the process will be

abnormally terminated. In step 1604, data having the length of size 1005 and starting from offset 1004 from the beginning of the target block to be processed (first block of the object for the first iteration) will be obtained. When obtaining the data, block-basis I/O provided by the block access module will be used as needed. In step 1605, data obtained in step 1604 will be set as the block number of the next target block to be processed. In step 1606, the object description data to be used will be switched to the object description data of the block type 1007. In step 1607, first tag will be discarded, and tag sequence starting from second tag will be shifted to left for one element. The process returns to step 1601 after step 1607. In step 1608, data having the length of size 1005 and starting from offset 1004 from the beginning of the target block will be obtained, in order to reply data as the return value of getObject(). When obtaining the data, block-basis I/O provided by the block access module will be used as needed.

The process flow of object-based I/O using the object description data in table form has been described as above.

Referring now to Fig. 17, the sequence of the object-based I/O using the object description data in parser form will be described. In the description below, getObject(object, i, j, k...) will be described.

In step 1701, the arguments i, j, k, ... will be set to the target sequence. In step 1702, the object parser will be

invoked so as to analyze the target block (first block of the object for the first iteration; the target may be changed to another block when the parse progress). The parser will terminate step 1702 if either the target sequence was detected by the parser or if parsed through the end of the object. In step 1703 the parser will detect the target sequence to determine whether or not the parsing has been successful. If true (Y) then in step 1704 the resulting parse data will be replied as the return value of the getObject(), otherwise if not (N) the process will be terminated abnormally.

The process flow of getObject(object, i, j, k...) using the object description data in parser form has been described as above.

Referring now to Fig. 18, the sequence of the object-based I/O using the object description data in parser form will be described. In the description below, getObject(object, "tag") will be described.

In step 1801, the "tag" argument will be set as the target tag. In step 1802, the object parser will be invoked so as to analyze the target block (first block of the object for the first iteration; the target may be changed to another block when the parse progress). The parser will terminate step 1802 if either the target sequence was detected by the parser or if parsed through the end of the object. In step 1803 the parser will detect the target sequence to determine whether or not the

parsing has been successful. If true (Y) then in step 1804 the resulting parse data will be replied as the return value of the getObject(), otherwise if not (N) the process will be terminated abnormally.

5       The process flow of getObject(object, "tag") using the object description data in parser form has been described as above.

Referring now to Fig. 19, the process flow of  
 foundObject("tag", offset, size, i, j, k...) invoked when  
 10 parsing of part of the object has been successful within the object description data in parser form will be described. By combining foundObject() with getObject() shown in Fig. 17 or with getObject() in Fig. 18, object-based I/O using the object description data in parser form will be implemented.

15       In step 1901, getObject() will be checked to see whether or not the target tag set in getObject() matches with the "tag" argument. If true (Y) then the process flow proceeds to step 1903, otherwise if not (N) then the process flow proceeds to step 1902. In step 1902, the target sequence set in getObject()  
 20 will be checked to see whether it matches with the arguments i, j, k, ... If true (Y) then the process flow proceeds to step 1903, otherwise if not (N) then the process flow will be terminated. In step 1903, data having the length of size and starting from the offset from the beginning of the target block  
 25 of getObject() will be obtained so as to set to the parse result.



When obtaining the data, block-basis I/O provided by the block access module will be used as needed.

The process flow of `foundObject()` used in the parser has been described as above. As can be seen, object-based I/O, high-function I/O will be achieved by combining the modules to be downloaded to the ANS. The object description data describing declaratively the structure of object may be used for the object-based I/O. The development cost of modules thereby will be reduced.

Referring now to Fig. 20, the operation of module registration from ANS client computer to the ANS. ANS client 2001 will register module 2006 to ANS 2002 through network 2003. The ANS 2002 is comprised of, as mentioned above, ANSC 2004 and disk 2005. In this case it may not be essential but may be preferable to write module 2006 with one of any platform-independent languages such that the module 2006 becomes independent from the machine type of the ANS 2002. As platform-independent languages, there are many languages of choice including interpreter languages. In particular there are some languages, which may provide platform-independent executables, safe-type systems, and safe execution environment by recognizing the displacement through the network, these are preferable for writing the module 2006.

Such languages as those recognizing the displacement through the network may sometimes be less effective in execution

performance than the ordinary compiler languages. In order to solve the problem, there are two alternatives: The first solution may be to provide a compiler within the ANS to recompile the module written in a language recognizing the displacement through the network to a faster executable, such as an executable written in machine language. In this case, compiling modules may be performed within the module management part 650.

The second solution may be to provide a computer outside the ANS with compilers for a plurality of types of ANS installed, to register modules to the ANS through this computer (ANS management computer). This alternative may be effective when it is difficult to install such large software as compilers to the ANS due to for example cost-performance ratio, or when a plurality of ANS does exist on the network.

Referring now to Fig. 21, the operation of module registration from an ANS client to the ANS through the ANS management computer will be described.

An ANS client computer 2101 will send a platform-independent module 2107 through the network 2103 to ANS management computer 2104. The ANS management part 2110 of the ANS management computer 2104 will refer to ANS management table 2111 as described later to select one of module compilers 2109, 2109', ... in accordance with the target ANS of the platform-independent module 2107. Then it will compile with said compiler the platform-independent module 2107 to obtain

a compiled module 2108. In addition, the ANS management part 2110 will obtain the network address of the target ANS of the compiled module 2108 from the ANS management table 2111 to send the compiled module 2108 to the target ANS. The target ANS 2102 is comprised of ANSC 2105 and disk 2106 as have been mentioned above.

Referring now to Fig. 22, the structure of ANS management table will be described.

ANS management table 2201 is comprised of four items, i.e., ANS name 2202, network address 2203, model 2204, and compiler 2205. The table maintains the relationships between a plurality of ANS network addresses, models, and module compilers. One row corresponds to one ANS.

The ANS name 2202 is the name of an ANS. The network address 2203 is the network address of the ANS. The model 2204 is the model name of the ANS. The compiler 2205 is the name of the module compiler used for compile modules for the ANS.

The structure of ANS management table has been described as above.

By using the ANS management computer 2104 having ANS management part 2110, ANS management table 2111, and module compilers 2109, 2109'... ANS will be achieved which may execute modules faster, and which will reduce management costs with respect to the compilation.

Referring now to Fig. 23, as an example of ANS, a method

for implementing striping I/O from an ANS client computer to a plurality of ANS will be described below.

Faster I/O may be enabled by striping, that is, when ANS client computer 2301 performs I/O to a file, the file will be saved on a plurality of disks, resulting in that a plurality of disk I/O may be distributed to a plurality of disks. The striping may be achieved as follows.

When the ANS client computer 2301 reads or writes a file striped on a plurality of ANS 2304, it will transmit request for striping information 2305 to the striping management ANS 2303. At this time, the striping management ANS 2303 will reply to the ANS client computer 2301 with the striping information indicating the way that the file is striped on the ANS 2304 (information indicating which ANS stores which block of the file). This feature may be implemented as an object access module 114 of the striping management ANS 2303.

The ANS client computer 2301 then computes the ANS storing the part to read/write of the file based on the striping information to transmit I/O request 2306 to one or more of appropriate ANS. This two-step operation enables the striping I/O on a plurality of ANS to be implemented.

The striping has been heretofore implemented on the server, and the storage has been passive for receiving I/O requests from the server. With the method as mentioned above, the storage itself may implement the striping. This will result in the

extensibility and interchangeability of the storage. For example, if a user who bought one storage intended to implement striping I/O to solve the bottleneck of the storage by adding another storage, in accordance with the conventional implementation of the striping on the server, he or she needs to buy a new server at the same time, resulting in expensive modification of storage. However, the method of the present invention provides advantages that no additional server is required, that striping may be readily implemented by preparing two storages and downloading the object access module 114.

The present invention provides a method and apparatus for implementing a storage directly connected to a network or providing advanced functions, comprising the steps of:

for reducing the development cost of modules,

(a) Providing the storage with object access modules which performs I/O of a piece of data (object) used by applications as common part of the advanced functions for a plurality of applications;

(b) Providing object description data declaratively describing how the object is stored on a secondary storage;

(c) Enabling the advanced functions for a plurality of applications to be implemented by separating function module and object access modules to use object I/O function of the common part;

(d) Providing a module for protecting the use of object

access modules from the function module (protection module);

(e) Providing a locking module for implementing mutual exclusion with the containment between modules being considered in order to perform appropriate mutual exclusion of a plurality of objects; and

(f) Providing the storage or management computer with a compiler to implement the mechanism for faster execution of modules;

and for reducing the total cost of ownership when using a plurality of ANS,

(g) Using a management computer for distributing modules among a plurality of storage present.

Although the present invention has been described in conjunction with several preferred embodiments thereof, it should be understood that these embodiments are disclosed by way of examples and the present invention is not to be limited thereto. It should be recognized that many changes and modifications may be made by those skilled in the art without departing from the true spirit and the scope of the present invention set forth in the appended claims.

What Is Claimed Is:

1. A method for implementing extensible network-attached secondary storage operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storage apparatus, said method comprising the steps of:

executing one or more of application programs on said first computer;

providing said secondary storage apparatus with storage medium (secondary storage) that can save data after shutting down of power source, said secondary storage including a plurality of storage units (blocks) for storing one or more of application data (object) used by said application programs, said secondary storage apparatus providing said first computer with block-based I/O function and object-based I/O function;

receiving a program module (object access module) that implements the object-based I/O function by using the block-based I/O function from the first computer or a second computer different from the first computer; and

receiving object-based I/O request for said object from said first computer to perform object-based I/O of the request by executing said object access module.

2. A method for implementing extensible network-attached secondary storage according to claim 1, wherein:

said object access module obtains the data value or location of data in the block corresponding to a specification, which is either object, object offset, object offset size, or object tag (specifying the type of data to be retrieved).

5           3. A method for implementing extensible network-attached secondary storage operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storages, said method comprising the steps of:

10           executing one or more of application programs on said first computer;

15           said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks);

20           storing one or more of application data (object) used by said application programs on said secondary storage; and

25           registering or deleting to/from said secondary storage apparatus a program module (object access module) that implements object-based I/O function by using block-based I/O function.

4. A first computer according to claim 3, wherein:

said object access module obtains the data value or location of data in the block corresponding to a specification, which is either object, object offset, object offset size, or



object tag (specifying the type of data to be retrieved).

5        5. An object access module operable with one or more of  
first computers, one or more of secondary storage apparatus,  
and a network or I/O cable for connecting said first computers  
with said secondary storages, said object access module  
comprising:

      said first computer executing one or more of application  
programs;

10        said secondary storage apparatus including storage medium  
(secondary storage) that can save data after shutting down of  
power source, said secondary storage including a plurality of  
storage units (blocks), said secondary storage storing one or  
more of application data (object) used by said application  
programs;

15        said secondary storage apparatus providing said first  
computer with block-based I/O function and object-based I/O  
function;

      said object access module implementing object-based I/O  
function using block-based I/O function;

20        said object access module sent from said first computer  
or a second computer different from said first computer to said  
secondary storage apparatus to execute therein.

      6. An object access module according to claim 5, wherein:

25        said object access module obtains the data value or  
location of data in the block corresponding to a specification,

which is either object, object offset, object offset size, or object tag (specifying the type of data to be retrieved).

7. A method for implementing extensible network-attached secondary storage, operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storages, said method comprising the step of:

executing one or more of application programs on said first computer;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, said secondary storage including a plurality of storage units (blocks);

storing on said secondary storage one or more of application data (object) used by said application programs;

providing for said first computer block-based I/O function and object-based I/O function from said secondary storage;

receiving from either the first computer or a second computer different from the first computer data indicating how said object is stored on said secondary storage (object description data);

receiving a request of object-based I/O on said object from said first computer to perform I/O of said request by identifying the location of said object on said secondary storage by using said object description data.

8. A method for implementing extensible network-attached secondary storage according to claim 7, wherein:

5 said object description data is data for specifying attribute or inter-block reference based on the offset and size thereof.

9. A method for implementing extensible network-attached secondary storage according to claim 7, wherein:

10 said object description data is data for specifying attribute or inter-block reference by a lexical analyzing program (parser) or a parser generating grammar.

10. A method for implementing extensible network-attached secondary storage according to claim 7, wherein:

15 said object description data is data for specifying the file format of said object based on whether the data stored in a specific part of one or more blocks contains some specific value or pattern.

20 11. A computer operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storages, said computer comprising:

said first computer executing one or more of application programs;

25 said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality

of storage units (blocks), said secondary storage storing one or more of application data (object) used by said application programs;

5       said computer registering to or deleting from said secondary storage apparatus data indicating how said object is stored on said secondary storage (object description data); and

      said secondary storage providing block-based I/O function and object-based I/O function.

12. A computer according to claim 11, wherein:

10       said object description data is data for specifying the data sequence or inter-block reference of data in a block based on the offset and size thereof.

13. A computer according to claim 11, wherein:

15       said object description data is data for specifying attribute or inter-block reference of data in a block by a lexical analyzing program (parser) or a parser generating grammar.

14. A computer according to claim 11, wherein:

20       said object description data is data for specifying the file format of said object based on whether the data stored in a specific part of one or more blocks contains some specific value or pattern.

15. A method for implementing extensible network-attached secondary storage, wherein:

25       said object access module obtains from the object

description data according to claim 7 through claim 14 a method of storing objects in a secondary storage.

16. A first computer according to claim 3, wherein:

5       said object access module obtains from the object description data according to claim 7 through claim 14 a method of storing objects in a secondary storage.

17. An object access module according to claim 5, wherein:

10       said object access module obtains from the object description data according to claim 7 through claim 14 a method of storing objects in a secondary storage.

18. A method for implementing extensible network-attached secondary storage, operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with  
15       said secondary storage apparatus, said method comprising the step of:

      executing one or more of application programs on said first computer;

20       said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, said secondary storage including a plurality of storage units (blocks);

      storing one or more of application data (object) used by said application programs on said secondary storage;

25       said secondary storage being a secondary storage of a

computer system for providing block-based I/O function and I/O function for application programs (advanced I/O) to said first computer, said secondary storage maintaining object access modules for implementing object-based I/O function by using block-based I/O function, said secondary storage receiving a module for implementing said advanced I/O function by using said object access module (function module) from said first computer or a second computer different from said first computer, then said secondary storage receiving a request for said advanced I/O from said first computer to perform I/O of said request by executing said function module.

19. A computer operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storages, said computer comprising:

said first computer executing one or more of application programs;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

said secondary storage apparatus operating as said first computer or said second computer different from said first

computer running within a computer system for providing to said first computer a block-based I/O function and an I/O function for said application programs (advanced I/O);

5       said secondary storage apparatus storing a module that implements object-based I/O function by using block-based I/O function (object access module);

      said computer registering to or deleting from said secondary storage a module that implements said advanced I/O by using said object access module (function module).

10       20. A program module operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storages, said program module comprising:

15       said first computer executing one or more of application programs;

20       said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

      said secondary storage apparatus providing said first computer with a block-based I/O function and an I/O function for said application programs (advanced I/O);

25       said program module being sent from said first computer

or a second computer different from said first computer to said secondary storage apparatus to be executed on said secondary storage apparatus;

5       said program module providing said advanced I/O by using a module (object access module) that implements object-based I/O function by using block-based I/O function.

21. A secondary storage apparatus and a protection module thereon, operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storages, 10       said apparatus comprising:

      said first computer executing one or more of application programs;

      said secondary storage apparatus including storage medium 15       (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

20       said secondary storage apparatus providing to said first computer a block-based I/O function and an I/O function for said application programs (advanced I/O);

      said secondary storage apparatus maintaining a module that implements object-based I/O function by using block-based I/O 25       function (object access module), as well as a module that



implements said advanced I/O by using said object access module  
(function module);

said protection module determining a method invocation to  
be allowed or denied when said function module attempts to invoke  
5 a method in the object access module.

22. A protection module according to claim 21, wherein:

said protection module is registered to or deleted from  
said secondary storage apparatus by said first computer or a  
second computer different from said first computer running  
10 within said computer system.

23. A method for implementing extensible network-  
attached secondary storage, operable with one or more of first  
computers, one or more of secondary storage apparatus, and a  
network or I/O cable for connecting said first computers with  
15 said secondary storage apparatus, said method comprising the  
step of:

said first computer executing one or more of application  
programs;

said secondary storage apparatus including storage medium  
20 (secondary storage) that can save data after shutting down of  
power source, and said secondary storage including a plurality  
of storage units (blocks), said secondary storage storing in  
one or more of blocks one or more of application data (object)  
used by said application programs;

25 said secondary storage apparatus providing said first

computer with a block-based I/O function and an I/O function for said application programs (advanced I/O);

said secondary storage apparatus maintaining an object access module that implements object-based I/O function by using block-based I/O function, as well as a module that implements said advanced I/O by using said object access module (function module);

said module (protection module) for determining whether a method invocation is allowed or denied when said function module attempts to invoke a method in the object access module being received from said first computer or a second computer different from said first computer.

24. A computer operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storage apparatus, said computer comprising:

said first computer executing one or more of application programs;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

said secondary storage apparatus operating as said first

computer or said second computer different from said first computer running within a computer system for providing to said first computer a block-based I/O function and an I/O function for said application programs (advanced I/O);

5        said secondary storage apparatus storing an object access module that implements object-based I/O function by using block-based I/O function, as well as a module that implements said advanced I/O by using said object access module (function module);

10        said computer registering to or deleting from said secondary storage apparatus said protection module for determining a method invocation to be allowed or denied when said function module attempts to invoke a method in the object access module.

15        25. A locking module on a secondary storage apparatus operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storage apparatus, said module comprising:

20        said first computer executing one or more of application programs;

      said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality  
25 of storage units (blocks), said secondary storage storing in

one or more of blocks one or more of application data (object)  
used by said application programs;

said secondary storage apparatus providing said first  
computer with a block-based I/O function and an I/O function  
5 for said application programs (advanced I/O);

said secondary storage apparatus storing an object access  
module that implements object-based I/O function by using  
block-based I/O function;

when said object access module provides external devices  
a plurality of objects having containment, said locking module  
providing external devices with mutual exclusion function with  
the containment of said a plurality of objects being taken into  
consideration.

26. A locking module according to claim 25, wherein:

said locking module is registered to or deleted from said  
secondary storage apparatus by said first computer or a second  
computer different from said first computer.

27. A method for implementing extensible network-  
attached secondary storage, operable with one or more of first  
20 computers, one or more of secondary storage apparatus, and a  
network or I/O cable for connecting said first computers with  
said secondary storage apparatus, said method comprising the  
step of:

executing on said first computer one or more of application  
25 programs ;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

providing from said secondary storage apparatus to said first computer with a block-based I/O function and an I/O function for said application programs (advanced I/O);

maintaining on said secondary storage apparatus an object access module that implements object-based I/O function by using block-based I/O function;

receiving locking module from said first computer or a second computer different from said first computer; when said object access module provides external devices a plurality of objects having containment, said locking module for providing external devices with mutual exclusion function with the containment of said a plurality of objects being taken into consideration.

28. A computer operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storage apparatus, said computer comprising:  
said first computer executing one or more of application programs;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

said secondary storage apparatus operating as said first computer or said second computer different from said first computer running within a computer system for providing to said first computer a block-based I/O function and an I/O function for said application programs (advanced I/O);

said secondary storage apparatus storing an object access module that implements object-based I/O function by using block-based I/O function;

when said object access module provides external devices a plurality of objects having containment, said computer registering to or deleting from said secondary storage apparatus said locking module for providing external devices with mutual exclusion function with the containment of said plural objects being taken into consideration.

29. A management computer operable with one or more of first computers, one or more of secondary storage apparatus, one second computer (a management computer), and a network or I/O cable for connecting said first computers and said second computer with said secondary storage apparatus, said management

computer comprising:

said first computer executing one or more of application programs;

said second computer storing the list of said secondary storage apparatus;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks);

said secondary storage apparatus provides said first computer with block-based I/O function and I/O function for said application programs (advanced I/O) or object-based I/O function;

said first computer sending to said second computer a protection module (module) that implements said advanced I/O;

said second computer receiving said module to send it to part or all of said secondary storage apparatus listed on the list;

said secondary storage apparatus receiving said module;

said first computer transmitting to said secondary storage apparatus a request of said advanced I/O;

said secondary storage apparatus invoking said module to perform said advanced I/O.

30. A management computer according to claim 29, wherein:

said management computer provides a compiler for compiling

said protection module for said secondary storage apparatus to compile said module received from said first computer using said compiler in order to send a compiled module to part or all of said secondary storage apparatus.

5           31. A management computer according to claim 30, wherein:  
said management computer storing model data of said secondary storage apparatus, provides one or more compilers for compiling modules for each model of said secondary storage apparatus, to compile said module received from said first  
10 computer using said one or more compilers for the destination secondary storage apparatus, to send a compiled module to part or all of said secondary storage apparatus.

32. A method for implementing extensible network-  
attached secondary storage, operable with one or more of first  
15 computers, one or more of secondary storage apparatus, one second computer (a management computer), and a network or I/O cable for connecting said first computers and said second computer with said secondary storage apparatus, said management computer comprising:

20           said first computer executing one or more of application programs;

          said second computer storing the list of said secondary storage apparatus;

          said secondary storage apparatus including storage medium  
25 (secondary storage) that can save data after shutting down of



power source, and said secondary storage including a plurality of storage units (blocks);

said secondary storage apparatus provides said first computer with block-based I/O function and I/O function for said application programs (advanced I/O) or object-based I/O function;

said first computer sending to said second computer a protection module (module) that implements said advanced I/O;

said second computer receiving said module to send it to part or all of said secondary storage apparatus listed on the list;

said secondary storage apparatus receiving said module;

said first computer transmitting to said secondary storage apparatus a request of said advanced I/O;

said secondary storage apparatus invoking said module to perform said advanced I/O.

33. A method for implementing extensible network-attached secondary storage, operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storage apparatus, said method comprising the step of:

executing on said first computer one or more of application programs;

said secondary storage apparatus including storage medium

(secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

providing from said secondary storage apparatus to said first computer with a block-based I/O function and an I/O function for said application programs (advanced I/O) or object-based I/O function;

receiving a protection module (object access module) that implements said object-based I/O function or said advanced I/O by using block-based I/O function from said first computer or a second computer different from said first computer;

providing said secondary storage apparatus with a compiler for compiling said module into an executable for faster execution;

compiling said module using said compiler on said secondary storage apparatus;

receiving a request of object-based I/O or advanced I/O on said object from said first computer; and

performing I/O of said request by executing said compiled module.

34. A method for implementing extensible network-attached secondary storage, operable with one or more of first computers, one or more of secondary storage apparatus, and a

network or I/O cable for connecting said first computers with said secondary storage apparatus, said method comprising the step of:

executing on said first computer one or more of application programs;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

providing from said secondary storage apparatus to said first computer with a block-based I/O function and an I/O function for said application programs (advanced I/O);

for said advanced I/O function, providing a feature of replying, in response to a request from said first computer, a correspondence between a plurality of part of one object and secondary storage apparatus for storing said part of object.

35. An apparatus for implementing extensible network-attached secondary storage, operable with one or more of first computers, one or more of secondary storage apparatus, and a network or I/O cable for connecting said first computers with said secondary storage apparatus, said apparatus comprising:

said first computer executing one or more of application programs;

said secondary storage apparatus including storage medium (secondary storage) that can save data after shutting down of power source, and said secondary storage including a plurality of storage units (blocks), said secondary storage storing in one or more of blocks one or more of application data (object) used by said application programs;

means for providing said first computer block-based I/O function and object-based I/O function;

means for receiving a program module (object access module) that implements object-based I/O function by using block-based I/O function from said first computer or a second computer different from said first computer;

means for receiving said object access module and for receiving a request of object-based I/O on said object access module from said first computer; and

means for executing said object access module.

## ABSTRACT OF THE DISCLOSURE

A storage comprising an object access module for the shared part for implementing advanced I/O provides an interface (121) for registering and deleting object description data declaring how to store objects within a second storage, in order to reduce the development cost of modules for implementing functions. Also, in order to reduce the total cost of ownership, modules are transferred to the storage through a management computer. The present invention allows the storage for contiguously providing functions effective to a vast range of applications to be provided with lower development cost as well as lower total cost of ownership.

Fig. 1

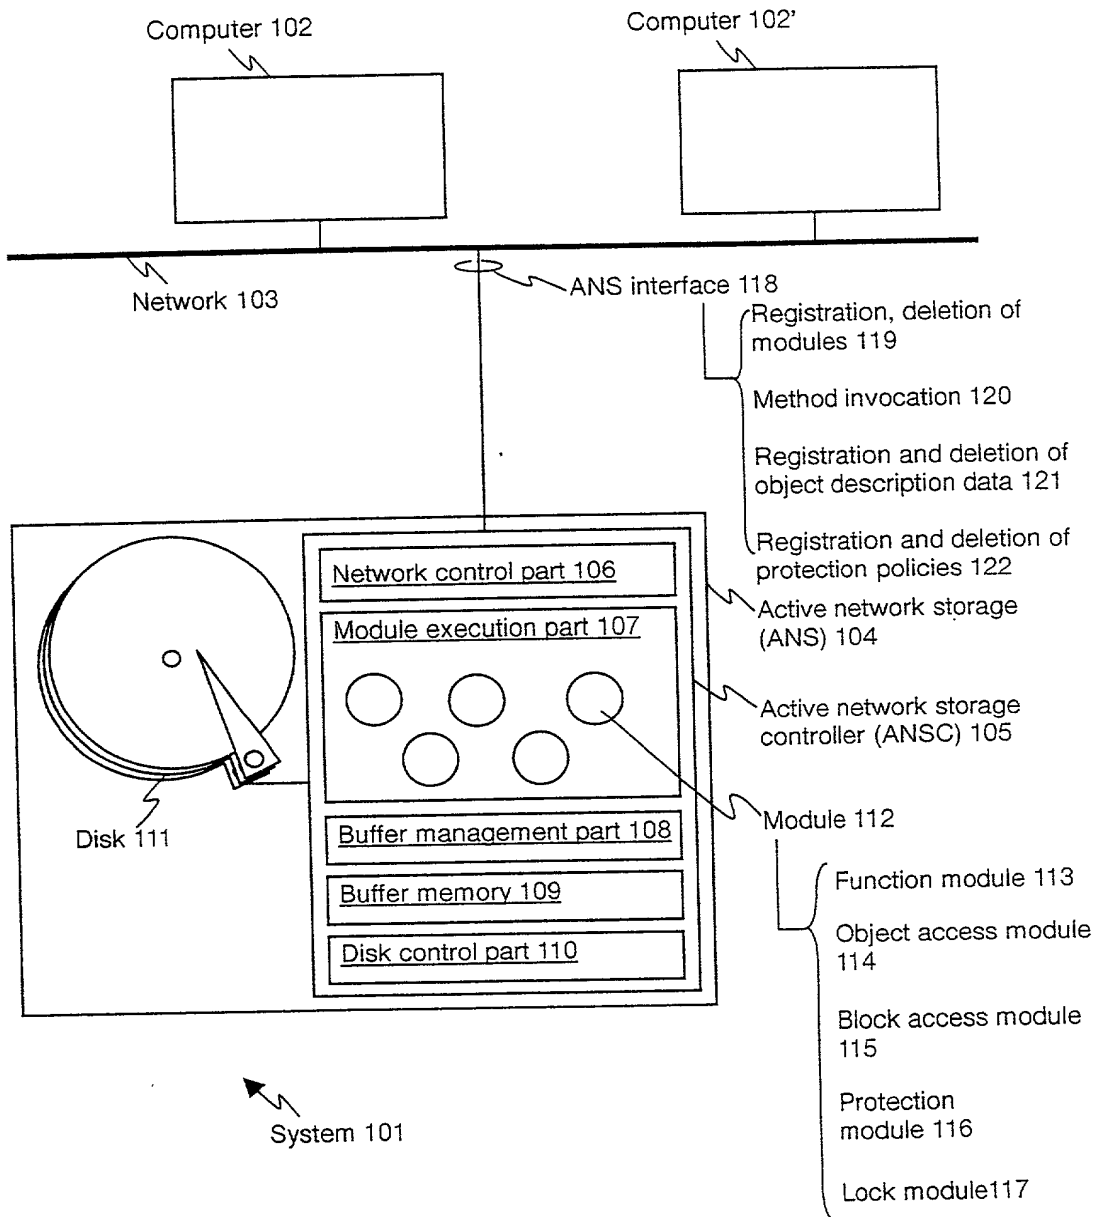


Fig. 2

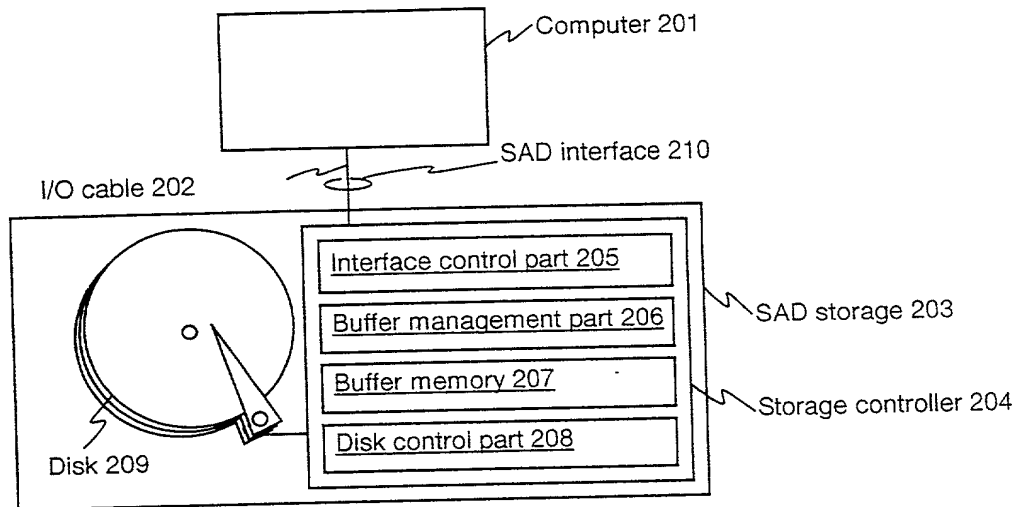


Fig. 3

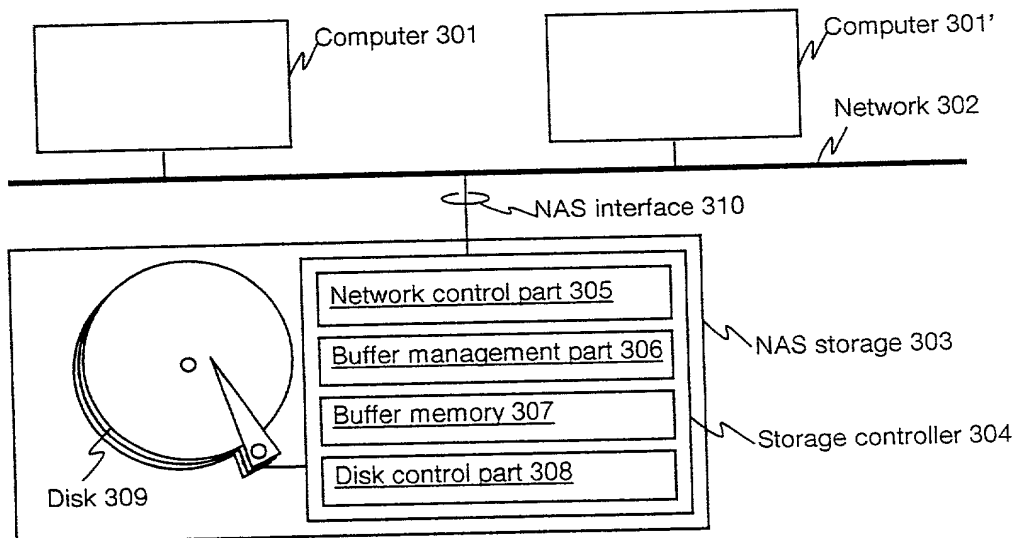


Fig. 4

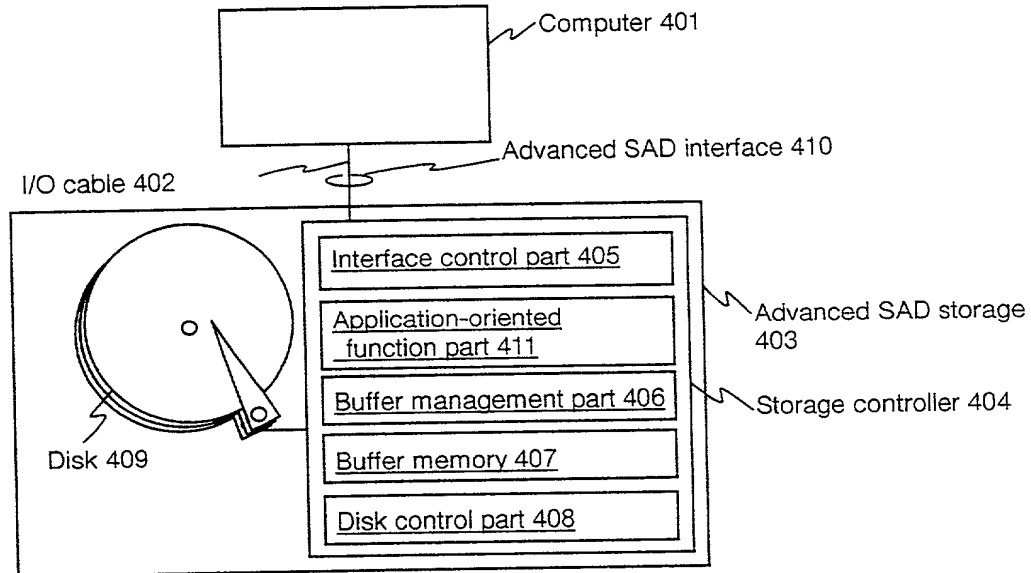


Fig. 5


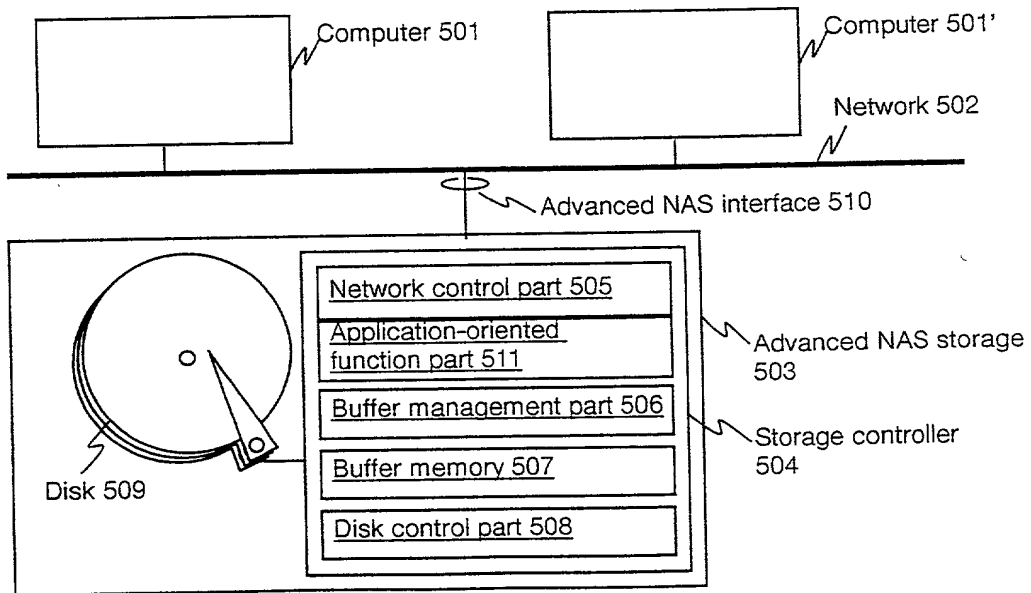




Fig. 6

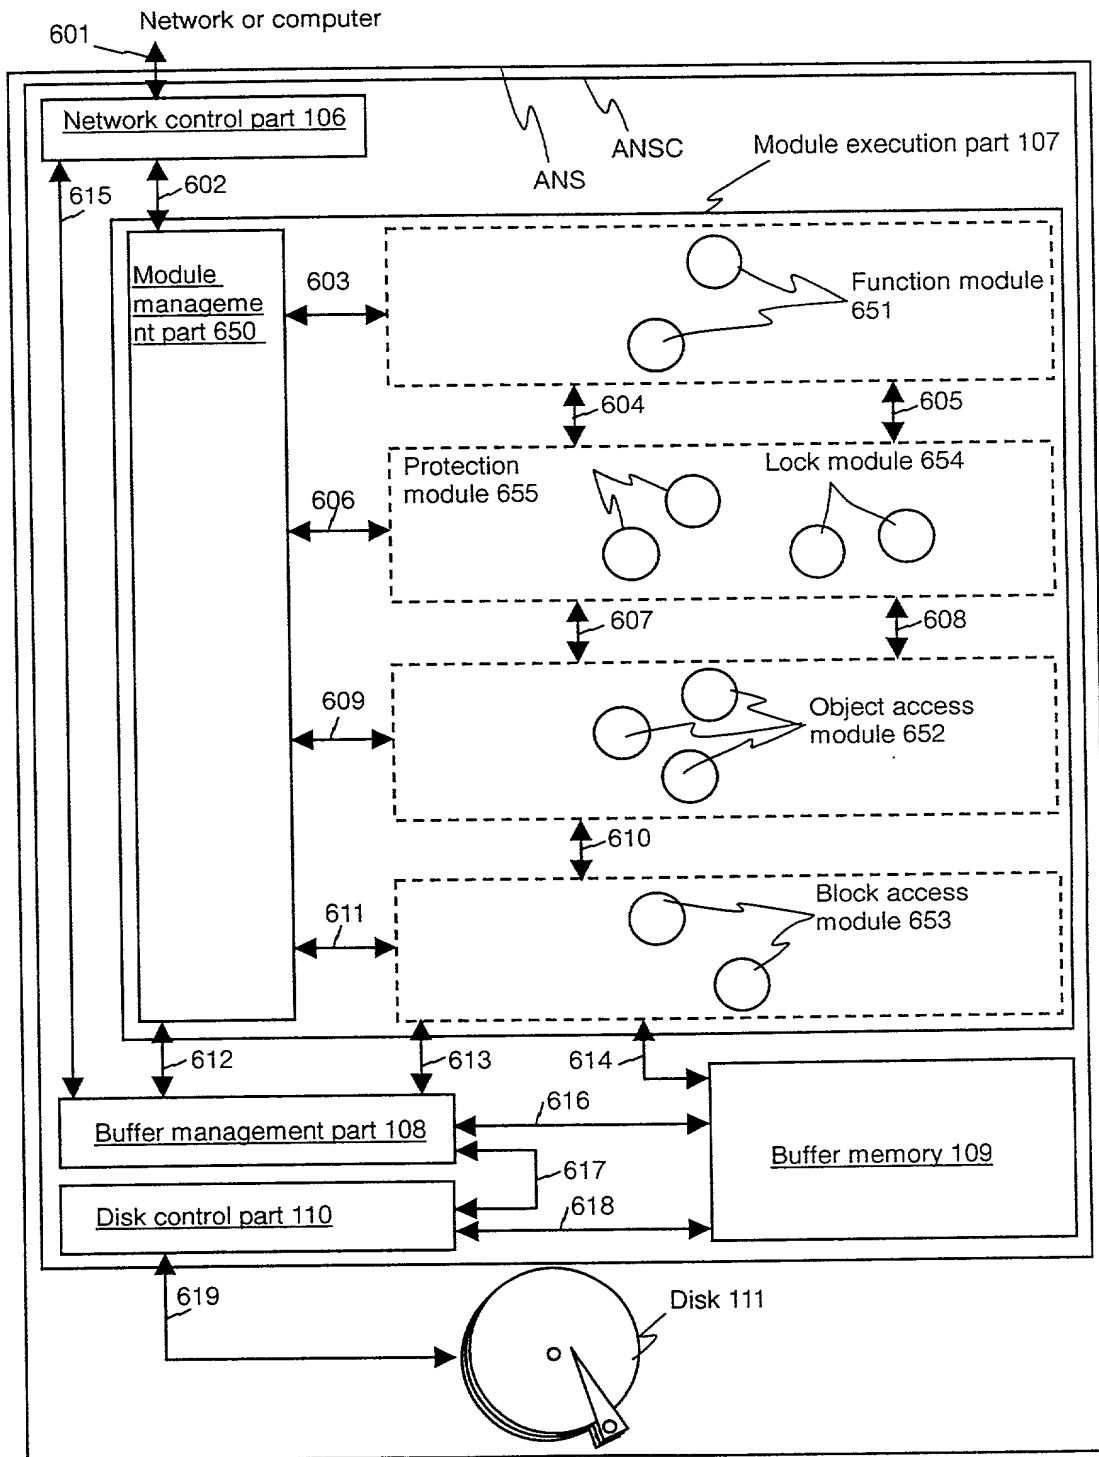

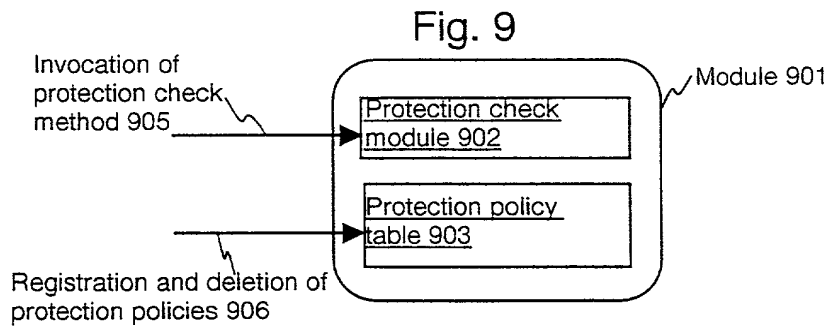
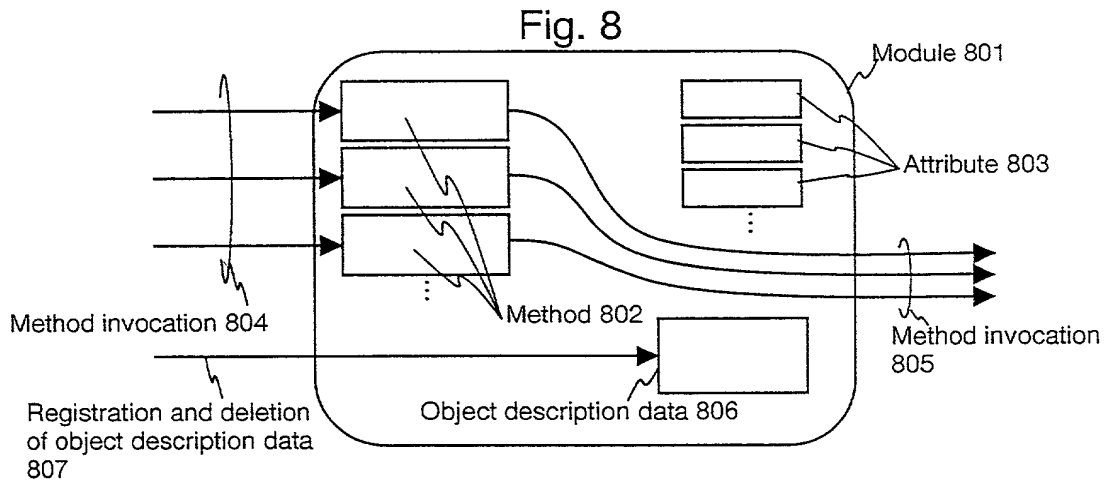
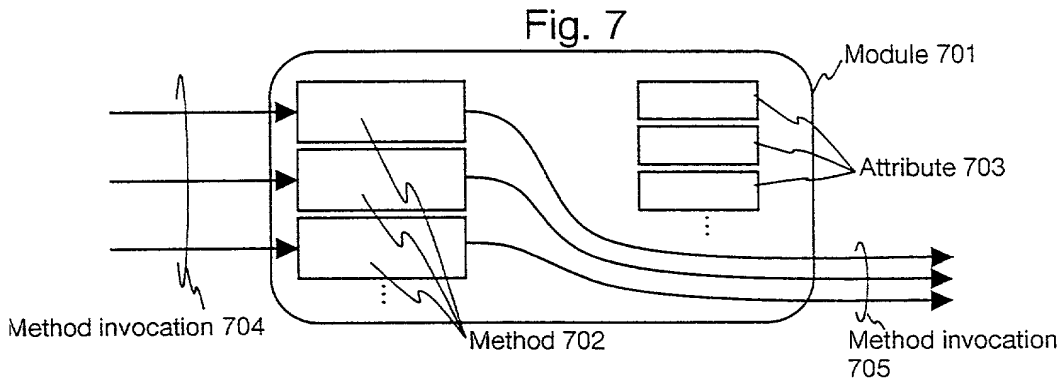


Fig. 10

Object description data (table form) 1001

Tag 1002	Type 1003	Offset 1004	Size 1005	Count 1006	Block type 1007
		:			

Fig. 11

UFS\_inode object 1101

Tag 1002	Type 1003	Offset 1004	Size 1005	Count 1006	Block type 1007
di_mode	short	0	2	1	null
di_nlink	short	2	2	1	null
di_uid	short	4	2	1	null
di_gid	short	6	2	1	null
di_size	long	8	4	1	null
di_addr1	BLOCK	12	3	10	UFS_data
di_addr2	BLOCK	42	3	1	UFS_indirect1
di_addr3	BLOCK	45	3	1	UFS_indirect2
di_addr4	BLOCK	48	3	1	UFS_indirect3
di_gen	byte	51	1	1	null
di_atime	long	52	4	1	null
di_mtime	long	56	4	1	null
di_ctime	long	60	4	1	null

UFS\_data3 object 1102

Tag 1002	Type 1003	Offset 1004	Size 1005	Count 1006	Block type 1007
data	byte	0	1	4096	null

UFS\_indirect13 object 1103

Tag 1002	Type 1003	Offset 1004	Size 1005	Count 1006	Block type 1007
bid	BLOCK	0	4	1024	UFS_data

UFS\_indirect23 object 1104

Tag 1002	Type 1003	Offset 1004	Size 1005	Count 1006	Block type 1007
bid	BLOCK	0	4	1024	UFS_indirect1

UFS\_indirect3 object 1105

Tag 1002	Type 1003	Offset 1004	Size 1005	Count 1006	Block type 1007
bid	BLOCK	0	4	1024	UFS_indirect2

Fig. 12

Object description data (parser form) 1201

Tag 1202	Initialization code 1203
Context 1204	Code 1205
	:

Fig. 13

```

create table customer (
    c_id          integer,
    c_name        char(40),
    c_address     varchar(100),
);
    
```

1301

132

Tag 1202	Initialization code 1203
Context 1204	Code 1205
customer()	{ record = 0; column = 0; }
(record())*	null
record()	{ int saved_offset = offset; }
record_size = <long>	{ record++; column = 0;
c_id() c_name()	foundObject("record",
c_address()	record_size, saved_off,
	record); }
c_id()	null
value = <long>	{ column++;
	foundObject("c_id",
	value, sizeof(long),
	record, column); }
c_name()	null
value = <char>[40]	{ column++;
	foundObject("c_name",
	value, sizeof(char)*4,
	record, column); }
c_address()	null
column_size = <long>	{ column++;
value =	foundObject("c_address",
<char>[column_size]	value, sizeof(char)*4,
	record, column); }

Fig. 14

Object description data (pattern matching form) 1401

<u>File format</u> 1402	<u>Tag</u> 1403	<u>Pattern</u> 1404
shell_script	header1	"#!"
	header2	"/bin/sh"
UNIX_executable	header1	ZMAGIC    NMAGIC    OMAGIC
:		

Fig. 15

Protection policy description data 1501

<u>Sender 1502</u>	<u>Receiver 1503</u>	<u>Method 1504</u>	<u>Allow/Deny</u> 1505
selectionModule	recordAccessModule	getObject("column")	Allow
selectionModule	blockAccessModule	getBlock()	Deny
:			

Fig. 16

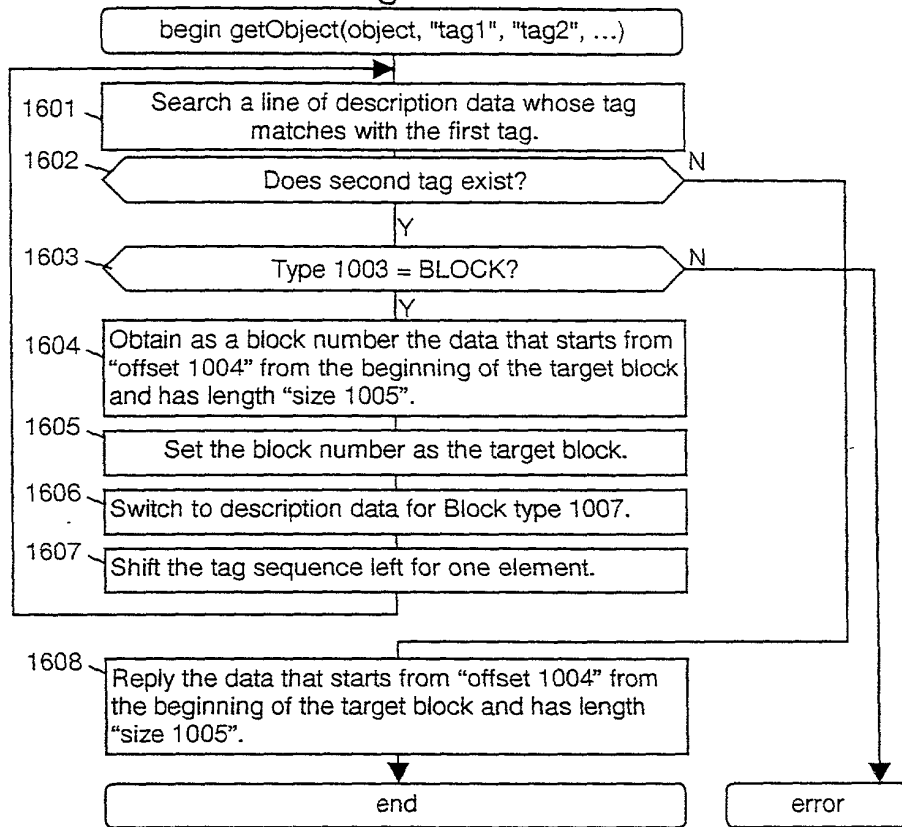


Fig. 17

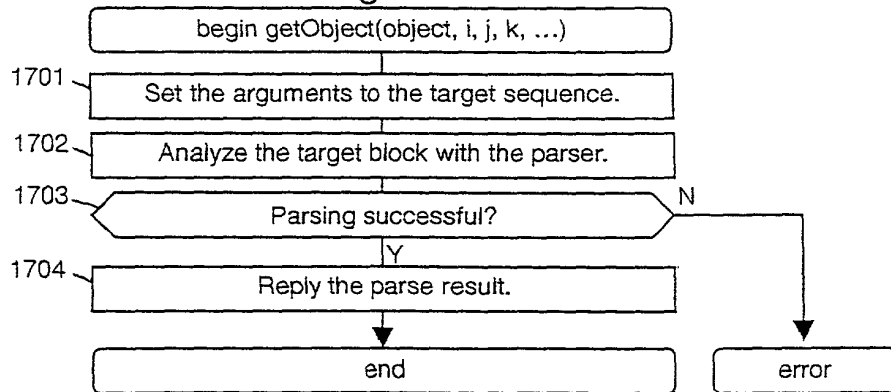


Fig. 18

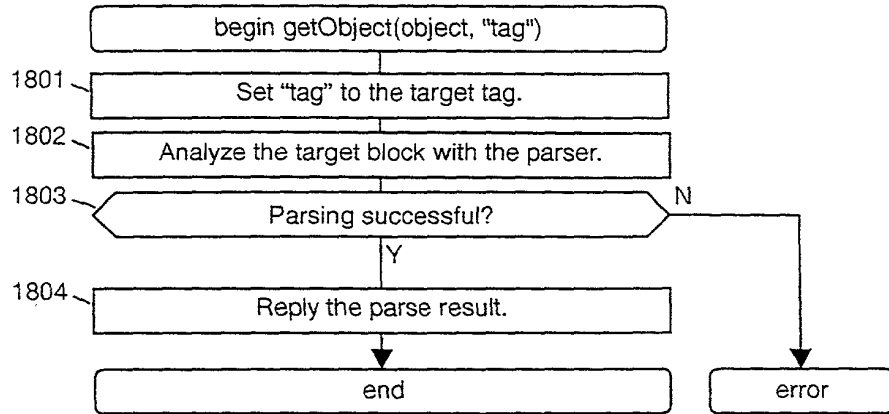


Fig. 19

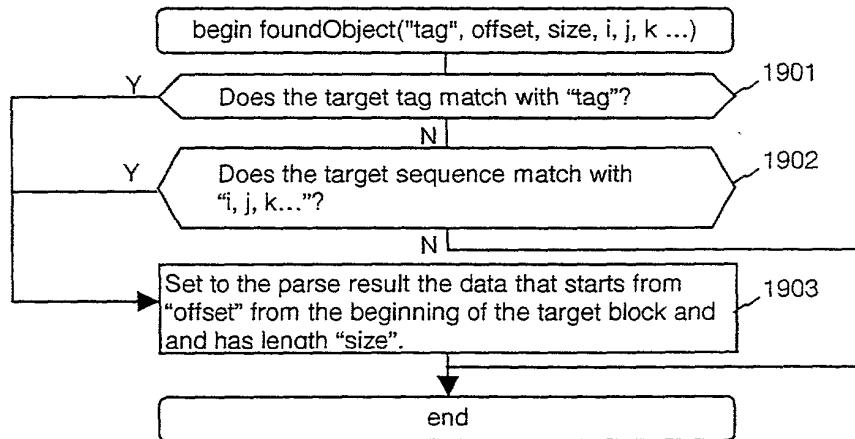


Fig. 20

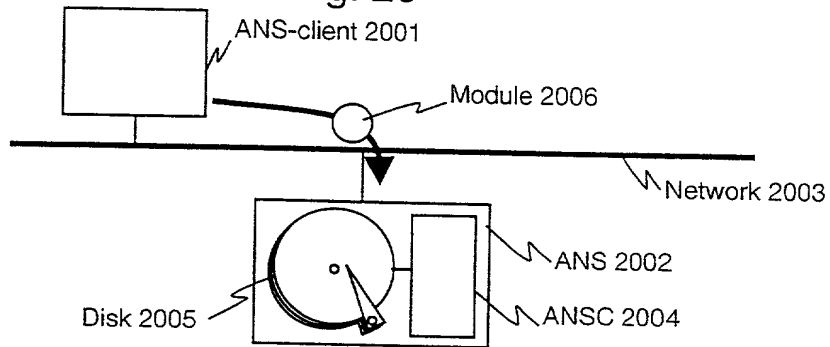


Fig. 21

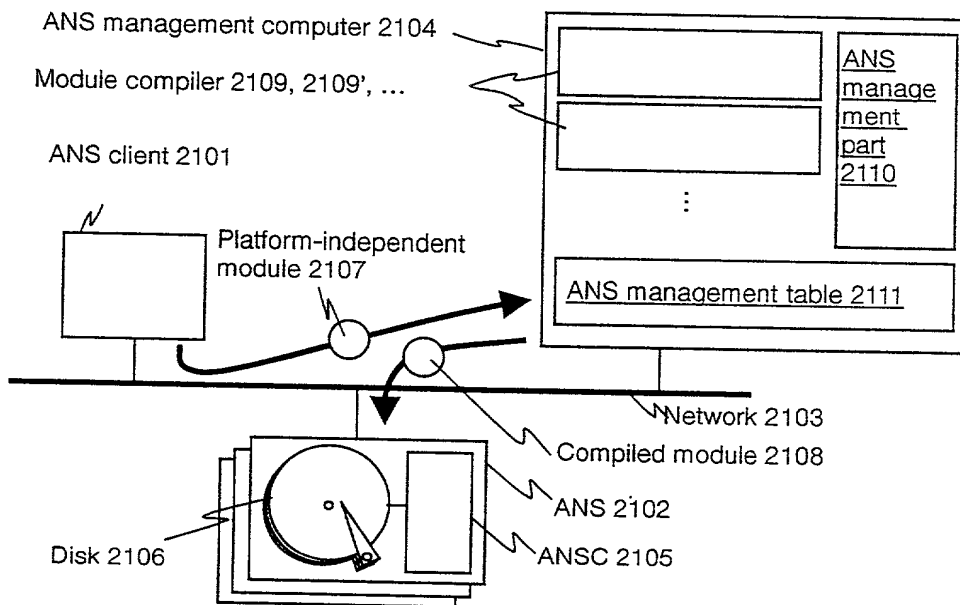


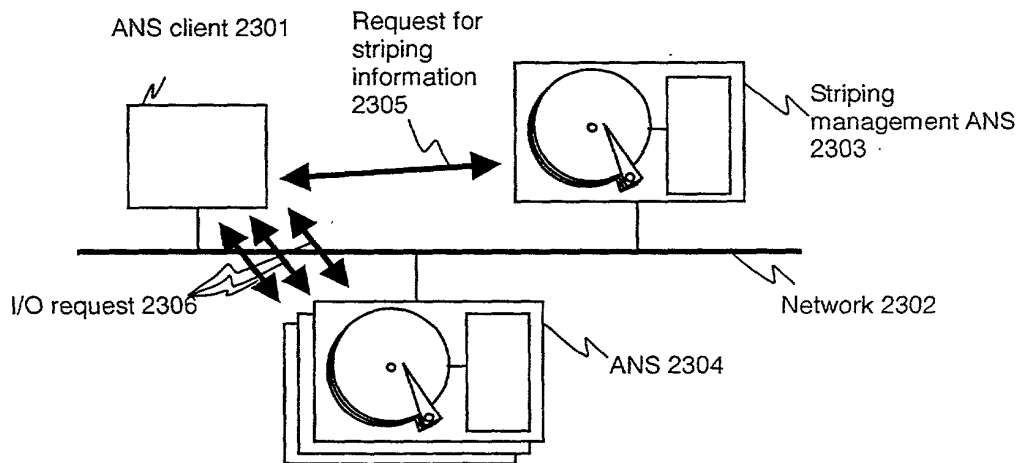


Fig. 22

ANS management table 2201

<u>ANS name 2202</u>	<u>Network address 2203</u>	<u>Model 2204</u>	<u>Compiler 2205</u>
disk1	123.123.11.1	A corp. type 342	compiler A
disk2	123.123.11.2	B corp. type F01	compiler B
		⋮	

Fig. 23



10/15

7306

マシ

98-2511

PTO/SB/106(8-96)

Approved for use through 9/30/98 OMB 0651-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that.

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR IMPLEMENTING

EXTENSIBLE NETWORK-ATTACHED SECONDARY STORAGE

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked

☐ \_\_月\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
(該当する場合) \_\_\_\_\_に訂正されました。☐ was filed on  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

## Japanese Language Declaration

## (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示している。

## Prior Foreign Application(s)

外国での先行出願

10-293277	Japan
(Number)	(Country)
(番号)	(国名)
(Number)	(Country)
(番号)	(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

15/October/1998	<input type="checkbox"/>
(Day/Month/Year Filed)	
(出願年月日)	
(Day/Month/Year Filed)	<input type="checkbox"/>
(出願年月日)	

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own

knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

### Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Donald R. Antonelli, Reg. No. 20,296, David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466, William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422, Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621

## 書類送付先

## Send Correspondence to

Antonelli, Terry, Stout & Kraus, LLP  
Suite 1800  
1300 North Seventeenth Street  
Arlington, Virginia 22209

## 直接電話連絡先：(氏名及び電話番号)

## Direct Telephone Calls to (name and telephone number)

Telephone: (703) 312-6600  
Fax: (703) 312-6666

唯一または第一発明者	Full name of sole or first inventor Shigekazu INOHARA
発明者の署名 日付	Inventor's signature Date 9/15/1998
住所	Residence Kokubunji, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

第二共同発明者	Full name of second joint inventor, if any Itaru NISHIZAWA	
第二共同発明者の署名	日付	Second inventor's signature Date <i>Itaru Nishizawa</i> 9/15/1999
住所	Residence Kodaira, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd, Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第三共同発明者	Full name of third joint inventor, if any Naoki WATANABE	
第三共同発明者の署名	日付	Third inventor's signature Date <i>Naoki Watanabe</i> 9/15/1999
住所	Residence Kodaira, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第四共同発明者	Full name of fourth joint inventor, if any Aki TOMITA	
第四共同発明者の署名	日付	Fourth inventor's signature Date <i>Aki Tomita</i> 9/16/1999
住所	Residence Tachikawa, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第五共同発明者	Full name of fifth joint inventor, if any Frederico Buchholz MACIEL	
第五共同発明者の署名	日付	Fifth inventor's signature Date <i>Frederico Buchholz Maciel</i> 9/15/1999
住所	Residence Kokubunji, Japan	
国籍	Citizenship Brazil	
私書箱	Post Office Address c/o Hitachi, Ltd, Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	

(第六以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for sixth and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

第六共同発明者	Full name of sixth joint inventor, if any Hiroaki ODAWARA	
第六共同発明者の署名	日付	Sixth inventor's signature Date <i>Hiroaki Odawara</i> 9/16/1999
住所	Residence Kodaira, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第七共同発明者	Full name of seventh joint inventor, if any Nobutoshi SAGAWA	
第七共同発明者の署名	日付	Seventh inventor's signature Date <i>Nobutoshi Sagawa</i> 9/15/1999
住所	Residence Koganei, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第八共同発明者	Full name of eighth joint inventor, if any Mamoru SUGIE	
第八共同発明者の署名	日付	Eighth inventor's signature Date <i>Mamoru Sugie</i> 9/16/1999
住所	Residence Tokorozawa, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第九共同発明者	Full name of ninth joint inventor, if any	
第九共同発明者の署名	日付	Ninth inventor's signature Date
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	

Please type a plus sign (+) inside this box → ☐

PTO/SB/122 (11-96)

Approved for use through 6/30/99. OMB 0651-0035

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# CHANGE OF CORRESPONDENCE ADDRESS *Application*

Address to:  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Application Number

Filing Date

October 13, 1999

First Named Inventor

INOHARA, ET AL

Group Art Unit

Examiner Name

Attorney Docket Number

520.37728X00


Please change the Correspondence Address for the above-identified application to:



Customer Number

020457

Type Customer Number here



OR



Firm or  
Individual Name

Address

Address

City

State

ZIP

Country

Telephone

Fax

jc525 U.S. PTO

09/416961

10/13/99

This form cannot be used to change the data associated with a Customer Number. To change the data associated with an existing Customer Number use "Request for Customer Number Data Change" (PTO/SB/124).

I am the :



Applicant.



Assignee of record of the entire interest.  
Certificate under 37 CFR 3.73(b) is enclosed.



Attorney or agent of record .

Typed or  
Printed Name

Carl I. Brundidge

Registration NO. 29,621

Signature

Date

October 13, 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.